

FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

Single Level Configurator – Build to Order

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**



MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

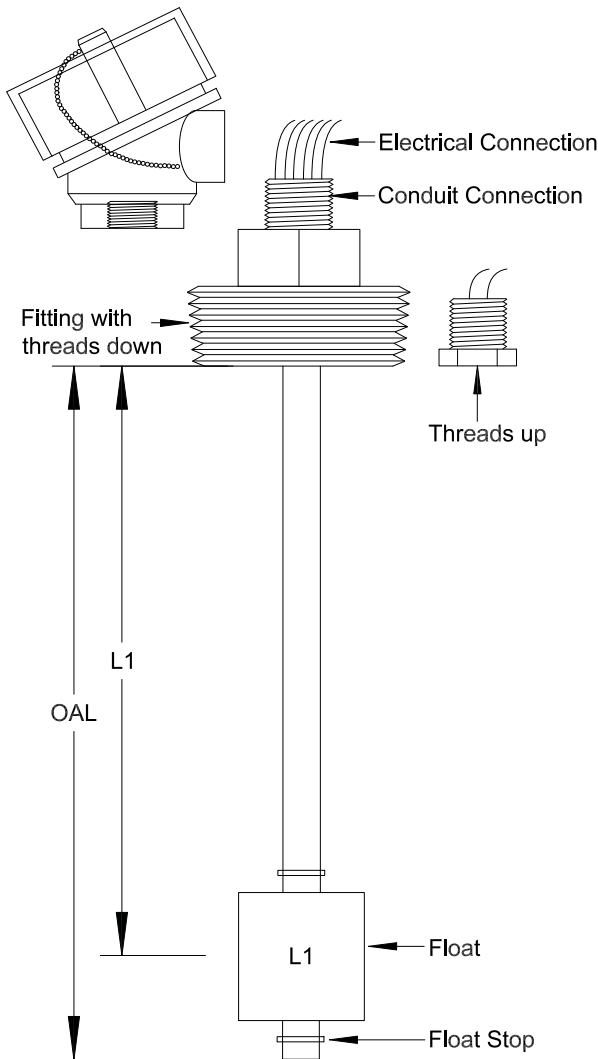

HOUSING:

- Nema 4X Explosion Proof Watertight NA

ELECTRICAL CONNECTION:

- Wire Cable Connector (specify) _____

CONDUIT CONNECTION:

- 1/2" NPT Other _____ NA

FITTING AND STEM MATERIAL:

- SS Brass PVC Poly Teflon

FITTING SIZE (NPT):

- 1/4" 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"
 Flange _____ Other _____

THREAD ORIENTATION:

- Threads down (*threads from outside of the tank*)
 Threads up (*threads from inside of the tank*)

LEAD LENGTH: _____"

FLOAT STOPS:

- Retaining ring Set collar

FLOAT MATERIAL:

- SS Buna Poly Teflon PVC

SWITCH TYPE:

- SPST SPDT

SWITCH RATING:

- 10 watt (500ma) 50 watt (1 amp) 100 watt (3 amp)

ACTUATION:

L1 _____"

OPERATION:

- N.O. N.C.

SPECIFIC GRAVITY:

- .60sg .93sg

Minimum actuation is 1" Maximum actuation is 235"

OPTIONS:

- Shroud Centering Disk
 Field Adjustable Length Compression Union
 Thermocouple _____ Thermistor _____
 Temp Switch N.O. or N.C. _____ °F set point

1.800.852.9984

www.FPIsensors.com

info@FPIsensors.com

Fax 651.681.1888