

# FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

## Three Level Configurator – Build to Order

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**



**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

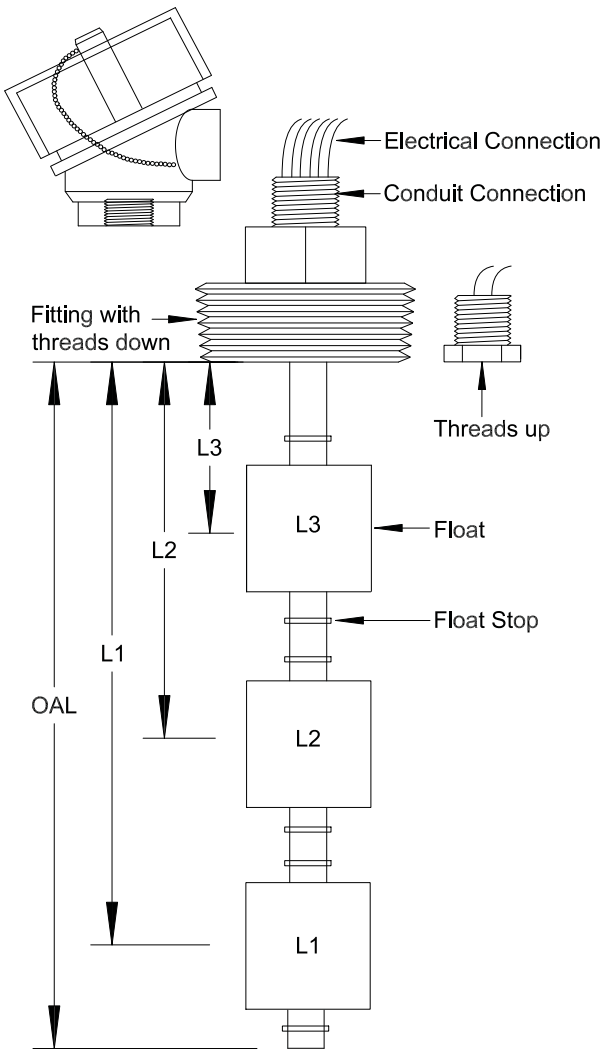

**HOUSING:**

- Nema 4X Explosion Proof
- Watertight
- NA

**ELECTRICAL CONNECTION:**

- Wire
- Cable
- Connector (specify) \_\_\_\_\_

**CONDUIT CONNECTION:**

- 1/2" NPT
- Other \_\_\_\_\_
- NA

**FITTING AND STEM MATERIAL:**

- SS
- Brass
- PVC
- Poly
- Teflon

**FITTING SIZE (NPT):**

- 1/4"
- 1/2"
- 3/4"
- 1"
- 1 1/4"
- 1 1/2"
- 2"
- Flange \_\_\_\_\_
- Other \_\_\_\_\_

**THREAD ORIENTATION:**

- Threads down (*threads from outside of the tank*)
- Threads up (*threads from inside of the tank*)

**LEAD LENGTH:** \_\_\_\_\_"

**FLOAT STOPS:**

- Retaining ring
- Set collar

**FLOAT MATERIAL:**

- SS
- Buna
- Poly
- Teflon
- PVC

**SWITCH TYPE:**

- SPST
- SPDT

**SWITCH RATING:**

- 10 watt (500ma)
- 50 watt (1 amp)
- 100 watt (3 amp)

**ACTUATION:**

- L3 \_\_\_\_\_"
- L2 \_\_\_\_\_"
- L1 \_\_\_\_\_"

**OPERATION:**

- N.O.
- N.C.
- N.O.
- N.C.
- N.O.
- N.C.

**SPECIFIC GRAVITY:**

- .60sg
- .93sg
- .60sg
- .93sg
- .60sg
- .93sg

Minimum actuation is 1" Maximum actuation is 235"

**OPTIONS:**

- Shroud
- Field Adjustable Length
- Thermocouple \_\_\_\_\_
- Temp Switch
- Centering Disk
- Compression Union
- Thermistor \_\_\_\_\_
- N.O. or  N.C. \_\_\_\_\_ °F set point

**1.800.852.9984**

[www.FPIsensors.com](http://www.FPIsensors.com)

info@FPIsensors.com

Fax 651.681.1888