

# FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

## LD-FPI-BB15




**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

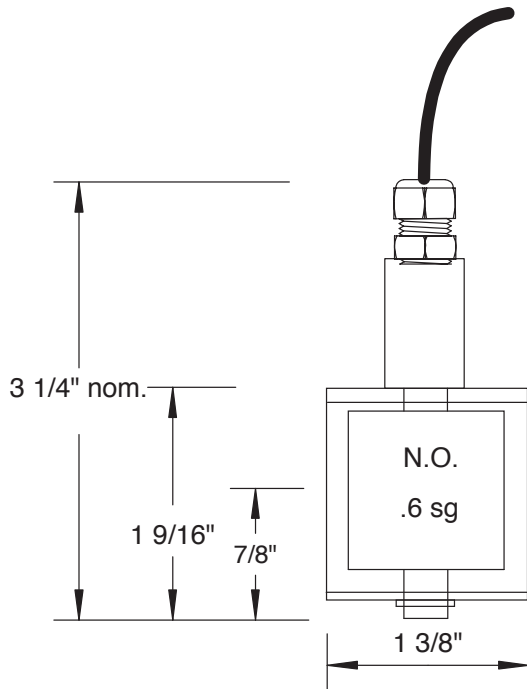

### WIRING DIAGRAM

Normal is when float is away from fitting



### SPECIFICATIONS

**SHROUD AND STEM ASSEMBLY:** Brass

**FLOAT:** Buna, 1" x 1"

**SWITCH:** SPST, 50 watt maximum  
265 volts and 1 amp maximum values

**SWITCH OPERATION:** N.O. reversible to N.C.

**WIRING:** 2 wire PVC cable, 22 ga., Black and Red, 15'

**MAXIMUM PRESSURE:** 150 PSI

**OPERATING TEMPERATURE:** -40 °F to +180 °F



*Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!*

**1.800.852.9984**

**FPIsensors.com**

Fax 651.681.1888

info@FPIsensors.com