

FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

LD-FPI-SS15




MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

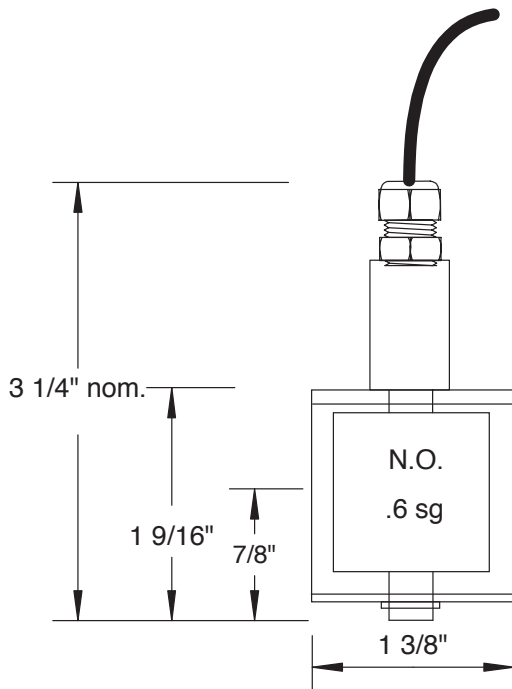

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATIONS

SHROUD AND STEM ASSEMBLY: Stainless Steel

FLOAT: 316 Stainless Steel, 1" x 1"

SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values

SWITCH OPERATION: N.O. reversible to N.C.

WIRING: 2 wire PVC cable, 22 ga., Black and Red, 15'

MAXIMUM PRESSURE: 150 PSI

OPERATING TEMPERATURE: -40 °F to +180 °F



Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!

1.800.852.9984

FPIsensors.com

Fax 651.681.1888

info@FPIsensors.com