

# FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

## LS-1000-PP



**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

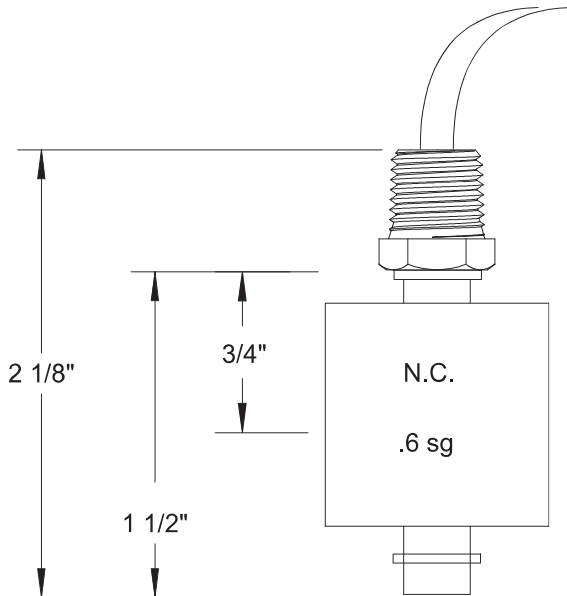

### SPECIFICATIONS

**FITTING:** Polypropylene, 1/8" NPT with 1/2" hex

**STEM:** Polypropylene, 5/16" diameter

**FLOAT:** Polypropylene, 1" x 1"

**FLOAT STOP:** Teflon O-ring

**SWITCH:** SPST, 50 watt maximum  
265 volts and 1 amp maximum values

**SWITCH OPERATION:** N.C. reversible to N.O.



**WIRING:** Red, 18 ga. PTFE, 24" length

**MAXIMUM PRESSURE:** 100 PSI

**OPERATING TEMPERATURE:** -10 °F to +150 °F

### WIRING DIAGRAM

Normal is when float is away from fitting

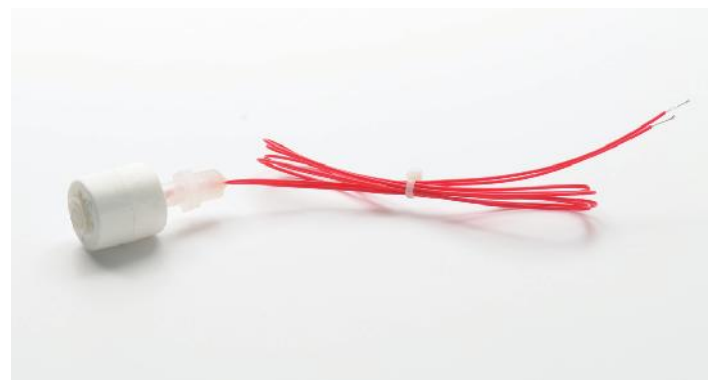

*Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!*

**1.800.852.9984**

**FPIsensors.com**

Fax 651.681.1888

info@FPIsensors.com