


We excel in LOW COST and HIGH QUALITY LS-1000-SS (9871-00056)

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

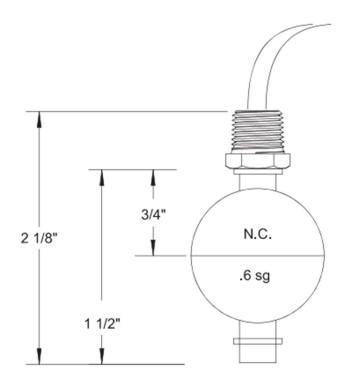

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATION

FITTING: 316 Stainless Steel, 1/8"NPT with 1/2"hex STEM: 316 Stainless Steel, 5/16"diameter FLOAT: Stainless Steel, 1 3/16"diameter FLOAT STOP: Stainless Steel retaining rings SWITCH: SPST, 50 watt maximum 265 volts and 1 amp maximum value SWITCH OPERATION: N.C. reversible to N.O. WIRING: Red, 18 ga. PTFE, 24" length MAXIMUM PRESSURE: 300 PSI OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587



Do you need something to be different? No problem, call or email and let us know how we can modify the product to meet your requirements.

RochesterSensors.com | 800-852-9984 | salesQT@rochestersensors.com

Since the suitability of these products depends upon a wide range of factors not in our control, Rochester Sensors expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Rochester Sensors reserves the right to make material changes, and or technical changes without notification. © *Rochester Sensors*. 11/23 *Rev* 1

