

FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

LS-2000-SB



MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

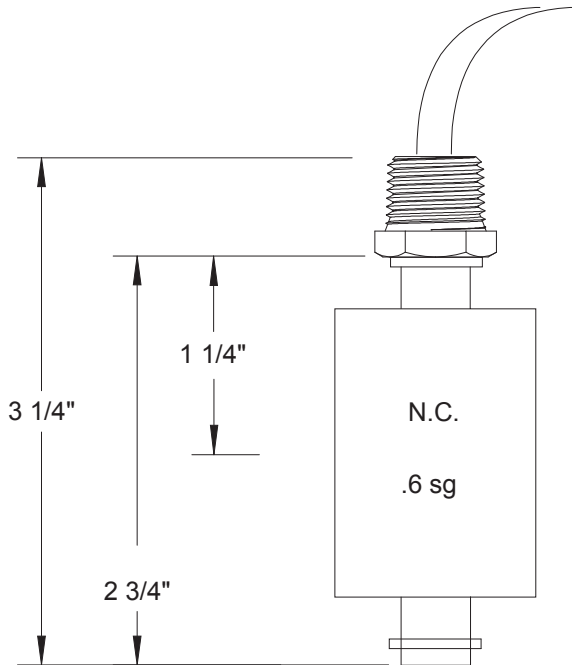

SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/8" NPT with 1/2" hex

STEM: 316 Stainless Steel, 3/8" diameter

FLOAT: Buna, 1 1/4" diameter x 1 3/4" tall

FLOAT STOP: Stainless Steel retaining rings

SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values

SWITCH OPERATION: N.C. reversible to N.O.

WIRING: Red, 18 ga. PTFE, 24" length



MAXIMUM PRESSURE: 150 PSI

OPERATING TEMPERATURE: -40 °F to +180 °F

UL FILE #: E324587

WIRING DIAGRAM

Normal is when float is away from fitting

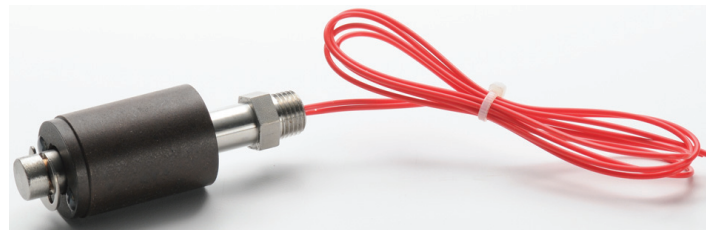

Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!

1.800.852.9984

FPIsensors.com

Fax 651.681.1888

info@FPIsensors.com