



We excel in LOW COST and HIGH QUALITY LS-5000-SS (9871-00060)

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

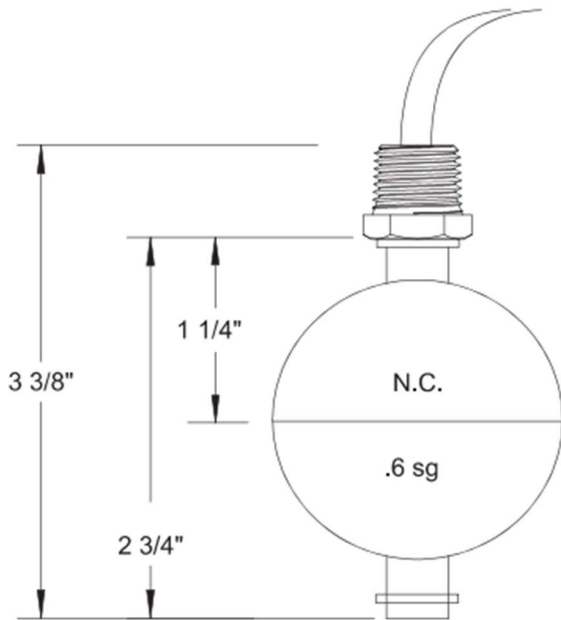

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/4" NPT with 5/8" hex

STEM: 316 Stainless Steel, 1/2" diameter

FLOAT: 316 Stainless Steel, 2 1/16" diameter

FLOAT STOP: Stainless Steel retaining rings

SWITCH: SPST, 50 watt maximum

265 volts and 1 amp maximum values

SWITCH OPERATION: N.C. reversible to N.O.

WIRING: Red, 18 ga. PTFE, 24" length

MAXIMUM PRESSURE: 750 PSI

OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587



Do you need something to be different?

No problem, call or email and let us know how we can modify this product to meet your exact requirements!