

FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

LTS-3000-SS



MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

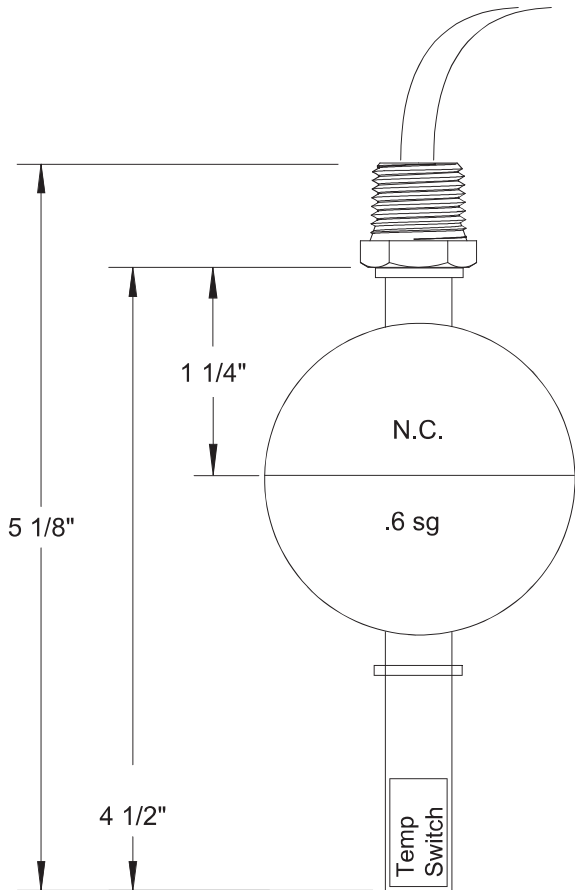

SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/4" NPT with 5/8" hex

STEM: 316 Stainless Steel, 1/2" diameter

FLOAT: 316 Stainless Steel, 2 1/16" diameter

FLOAT STOP: Stainless Steel retaining rings

LEVEL SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values
N.C. reversible to N.O.

TEMP SWITCH: 65 °C, N.C.
Specify desired temp and N.C. or N.O.


WIRING: 18 ga. PTFE, 24" length
Common: Black wire
Level switch: Yellow wire
Temp switch: Red wire

MAXIMUM PRESSURE: 750 PSI

OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587

WIRING DIAGRAM

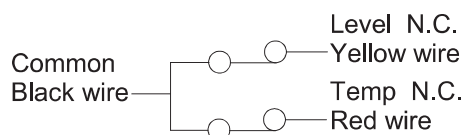

Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!

1.800.852.9984

FPIsensors.com

Fax 651.681.1888

info@FPIsensors.com