

FPI SENSORS INTERNATIONAL


A H I G H E R L E V E L O F S A T I S F A C T I O N

We excel in **LOW COST** » **HIGH QUALITY** » **72 HOUR MFG TIME**

SM-1000-SS




MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

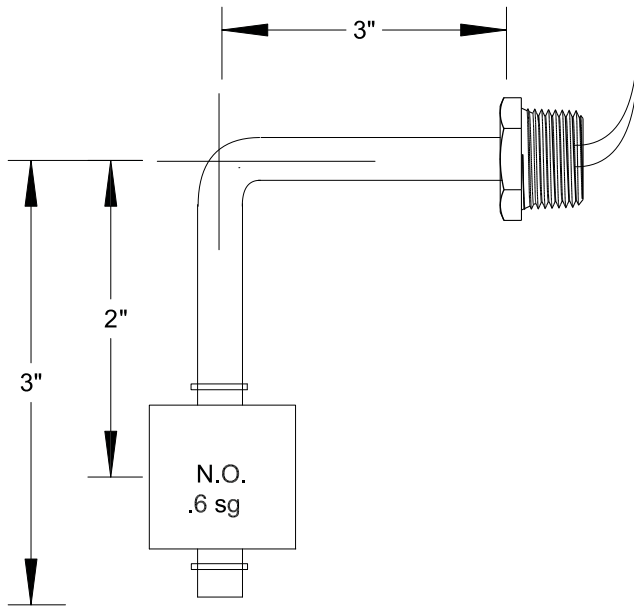

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/2" NPT with 7/8" hex

STEM: 316 Stainless Steel, 5/16" diameter

FLOAT: 316 Stainless Steel, 1" x 1"

FLOAT STOP: Stainless Steel retaining rings

SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values


SWITCH OPERATION: N.O. reversible to N.C.

WIRING: Red, 18 ga. PTFE, 24" length

MAXIMUM PRESSURE: 200 PSI

OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587

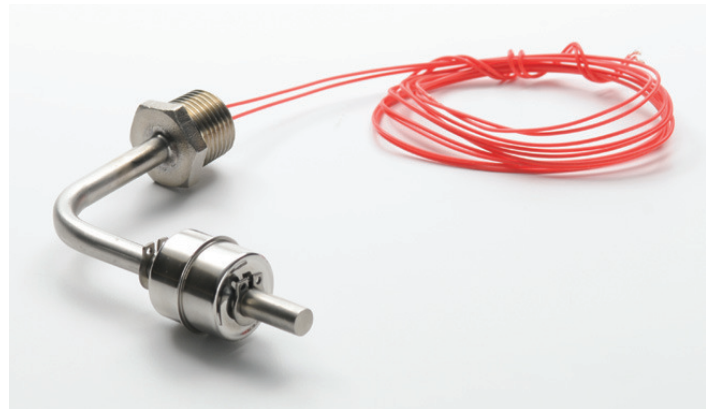

Do you need something to be different? No problem, call or email and let us know how we can modify this product to meet your exact requirements!

1.800.852.9984

www.FPIsensors.com

info@FPIsensors.com

Fax 651.681.1888